



SECONDARY PULVERIZER

F Series

...the fixed hydraulic pulverizer is suitable for the secondary demolition phase. Its particular hook shape makes it extremely versatile for use on the ground, allowing the demolition of boundary walls and vertical cement structures of medium height, paving and slabs with the consequent separation of the reinforcement iron in concrete...

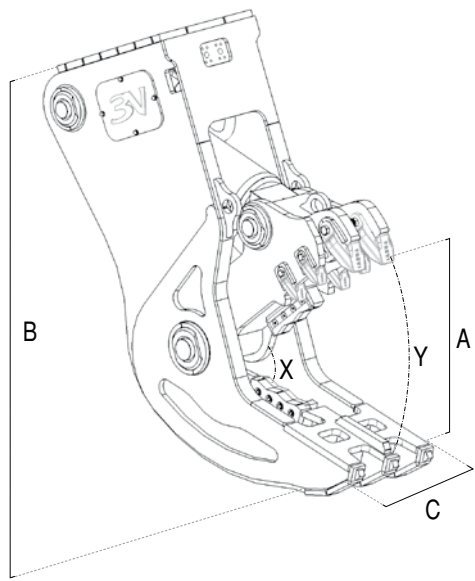

		F 07	F 12RD*	F 18RD*	F 20RRD*	F 25RD*	F 30RD*	F 70RD*
Excavator Weight	lbs	13,230 : 22,050	28,665 : 37,485	39,690 : 55,125	50,715 : 61,740	55,125 : 70,560	72,765 : 99,225	143,325 : 187,425
Weight	lbs	1,212	2,620	4,210	5,100	5,490	3,070	6,430
A	inches	18,7	21,2	31,9	31,9	80	82,7	108,3
B	inches	52,3	68,5	72,8	87,8	77	82,7	105
C	inches	13	16,5	18,5	18,5	22,4	25,2	31,5
	inches	5,5	8,7	10,2	10,2	10,2	10,2	12,8
X	t.	70	150	200	200	235	275	415
Y	t.	25	65	80	80	95	105	170
Working pressure	psi	3,600	4,500	4,500	4,500	4,500	4,500	4,900
Oil flow	g/min.	10 / 16	31 / 53	53 / 80	53 / 80	66 / 93	80 / 105	120 / 160
Rotation	psi / g/min.	/	/	/	2,000 / 3,8	/	/	

(*) Bolted interchangeable teeth version available

