





ROTATING PULVERIZER

FR Series

...the structural characteristics of this pulverizer allow the operator to tackle the primary and secondary demolition phases with just one equipment. As precise and quick as a crusher thanks to the continuous hydraulic rotation, powerful and productive thanks to the jaws typical of a demolisher...

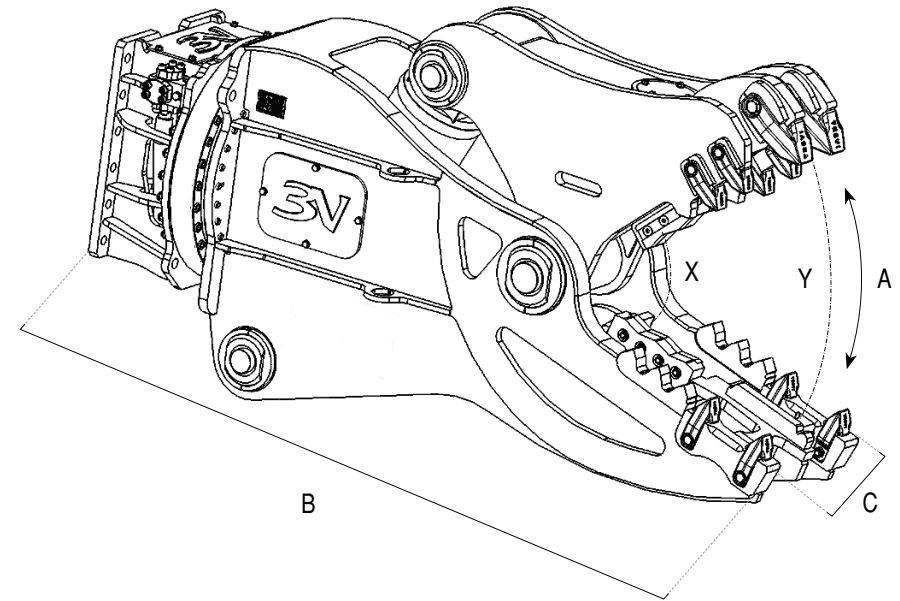

		FR 09RD*	FR 13RD*	FR 15RD*	FR 20RD*	FR 25RD*	FR 35RD*	FR 50RD*	FR 70RD*	FR 100N	FR 200	FR 250
Excavator Weight	lbs	19,845 : 26,460	28,665 : 33,075	35,280 : 46,305	48,510 : 61,740	63,945 : 77,175	79,380 : 110,250	112,455 : 147,735	149,940 : 187,425	189,630 : 286,650	220,500 : 441,000	220,500 : 551,250
Weight	lbs	2,000	2,900	3,600	4,670	6,260	7,600	11,000	15,300	25,200	45,300	54,300
A	inches	25,8	27,8	29,3	34,2	36	38,6	44,1	52	66,9	74,8	80,7
B	inches	68,1	75,6	80,7	91,7	95,3	98,4	111,8	127,9	151,6	176,4	202,4
C	inches	14,2	16,1	17,7	19,9	23,6	25,2	28,9	31,1	38,2	55,1	55,1
	inches	5,5	8,7	8,7	10,2	10,2	10,2	10,2	12,8	19,7	19,7	19,7
X	t.	85	140	180	200	230	305	320	400	450	860	990
Y	t.	40	55	65	80	105	120	135	170	200	380	410
Working pressure	psi	4,500	4,500	4,500	4,500	4,500	4,500	5,000	5,000	5,000	5,000	5,000
Oil flow	g/min.	40 / 66	48 / 66	48 / 66	53 / 80	66 / 92	80 / 105	92 / 118	118 / 158	132 / 211	237 / 317	237 / 317
Rotation	psi / g/min.	2,100 / 2,6	2,100 / 2,6	2,100 / 2,6	2,100 / 2,6	2,100 / 2,6	2,100 / 2,6	2,100 / 8	2,100 / 8	2,100 / 13	2,100 / 13	2,100 / 13

(*) Bolted interchangeable teeth version available