







# HYDRAULIC PRIMARY CRUSHER

## HC Series

...created for the most delicate and precise primary demolition phases, suitable for the demolition of reinforced concrete structures and the removal of materials at substantial heights, it is undoubtedly the fastest, most precise, powerful and compact equipment available on the market...

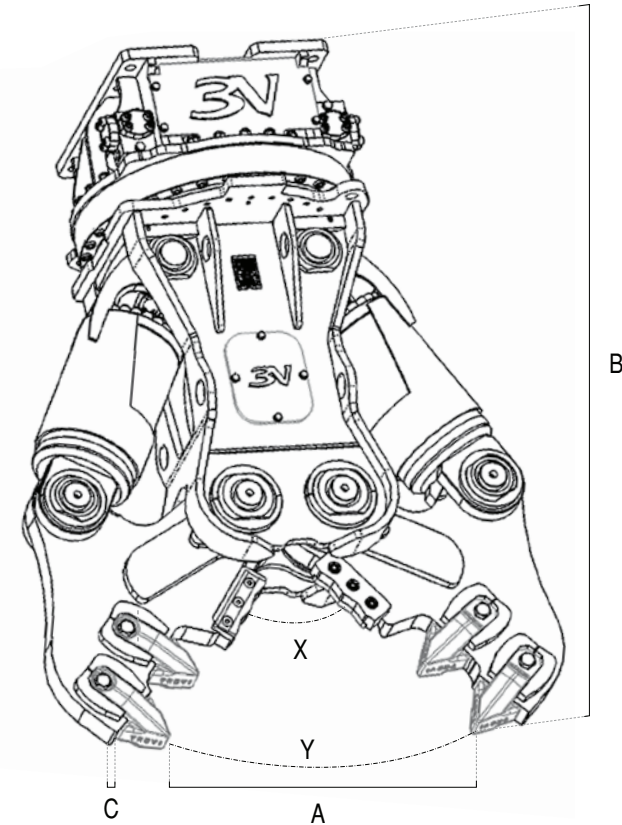

		HC 02	HC 05ND*	HC 10ND*	HC 13D**	HC 15ND*	HC 20ND*	HC 25ND*	HC 40	HC 50	HC 60	HC 80	HC 100	HC 120
Excavator Weight	lbs	4,410 : 8,820	11,025 : 18,225	22,050 : 33,075	44,100 : 55,125	35,280 : 46,305	48,510 : 61,740	63,945 : 77,175	79,380 : 108,045	110,250 : 143,325	145,530 : 187,425	189,630 : 231,525	189,630 : 286,650	189,630 : 330,750
Weight	lbs	400	1,200	2,250	2,900	3,700	4,700	5,800	8,400	10,700	14,300	18,900	23,700	26,900
A	inches	11	18,9	27	24	32,3	35	43	54	59	66	72	80	90
B	inches	40	51	61	69	70	75	83	99	106	116	124	132	145
C	inches	1	2	2,4	2,4	2,8	2,8	3,1	3,5	4	4	4,7	4,7	5,1
	inches	3,5	5,5	5,5	7,1	7,1	7,1	8,7	10,2	12,8	12,8	12,8	15,7	15,7
X	t.	60	80	160	180	170	205	220	365	470	590	720	760	820
Y	t.	18	20	45	45	60	70	75	85	120	145	185	220	240
Working pressure	psi	3,000	3,600	4,500	4,500	4,500	4,500	4,500	4,500	5,000	5,000	5,000	5,000	5,000
Oil flow	g/min.	10 / 16	21 / 39	39 / 66	47 / 66	47 / 66	53 / 79	66 / 92	79 / 105	79 / 118	105 / 132	118 / 170	132 / 211	132 / 211
Rotation	psi / g/min.	/	1,750 / 2,6	2,000 / 2,6	2,000 / 2,6	2,000 / 2,6	2,000 / 2,6	2,000 / 2,6	2,000 / 2,6	2,000 / 8	2,000 / 8	2,000 / 13	2,000 / 13	2,000 / 15

(\*) Bolted interchangeable teeth version available / (\*\*) Recommended for 44,100 to 55,125 lbs excavator with demolition long boom